



SHARP TOP

ROLLER CHAIN

Factory Preloading

Preloaded at the factory, reducing initial stretch and removing strains incurred during assembly.

Precision Heat-Treated


Consistency in hardness is the key to consistency in chain performance, therefore we precision heat-treat every part.


Shot Peened Parts

Link plates and rollers are shot peened after heat treatment, increasing fatigue strength and alleviating stress concentrations.

Solid Roller

Superior performance to split roller in high speed and high shock load applications. Allows smooth engagement at high speeds.

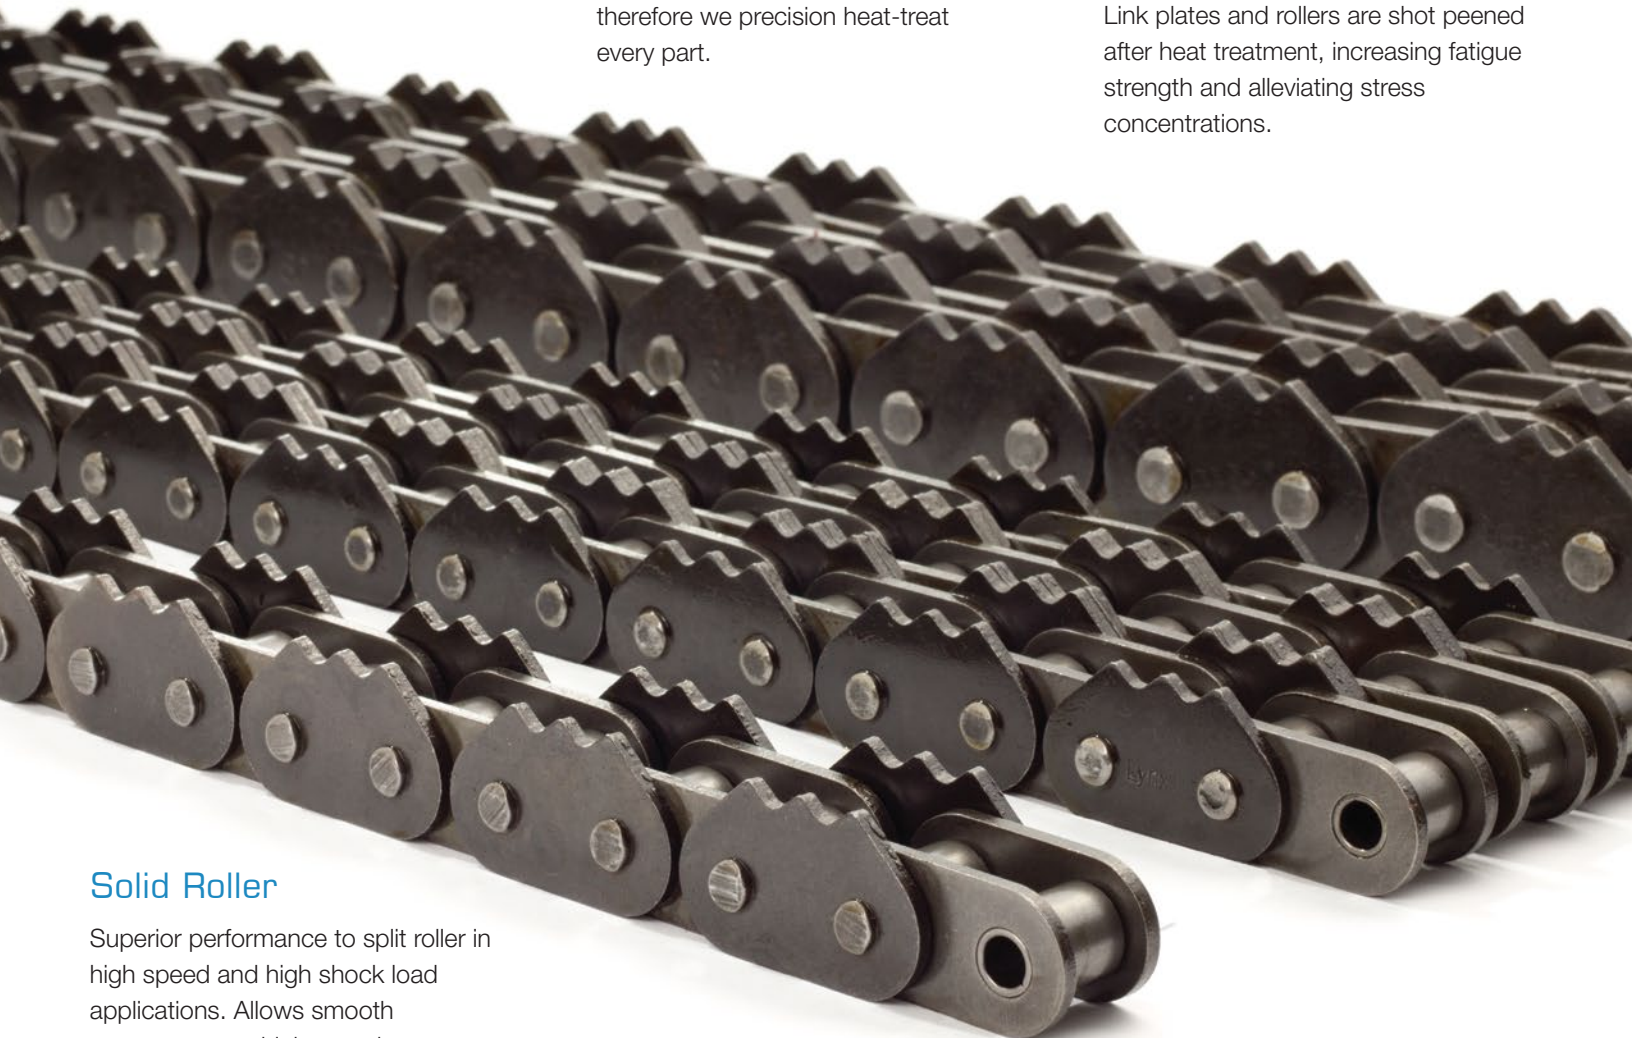




ST3-E2

3 POINTS EVERY 2 PITCHES




ST4-E2

4 POINTS EVERY 2 PITCHES




ST4-E1

4 POINTS EVERY PITCH



ST5-E1

5 POINTS EVERY PITCH



LP2-E2

LOW PROFILE SLASHER




LP3-E2

LOW PROFILE SLASHER




P2-E2A

2 POINTS EVERY 2 PITCHES (ALTERNATING)



SP1-E4

1 POINT EVERY 4 PITCHES



P1-E4A

1 POINT EVERY 4 PITCHES (ALTERNATING)



P1-E8A

1 POINT EVERY 8 PITCHES (ALTERNATING)



RST5-E2

SPECIAL 5-POINT DESIGN



B6-E2

6 POINTS EVERY PITCH



WF-E4

WAFERIZER EVERY 4 PITCHES



WF-E2

WAFERIZER EVERY 2 PITCHES



TP2-E2

2 POINTS EVERY 2 PITCHES

DISTRIBUTED BY:

www.lynxchain.com